


TEMPERATURE CONTROL WITH S.P.S.T. SWITCH AND AUXILIARY SWITCH FOR OFF POSITION. AUTOMATIC DEFROST FUNCTION BY CONSTANT CUT-IN VALUE

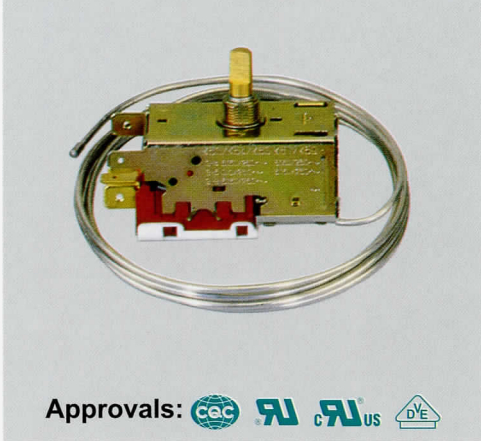


Terminal 3-4 closes at temperature rise
Terminal 3-6 opens in OFF position

Rating At 250 V 50 Hz


3-4: 6(6)A
3-6: 6(6)A

Approvals:


Construction/Dimensions

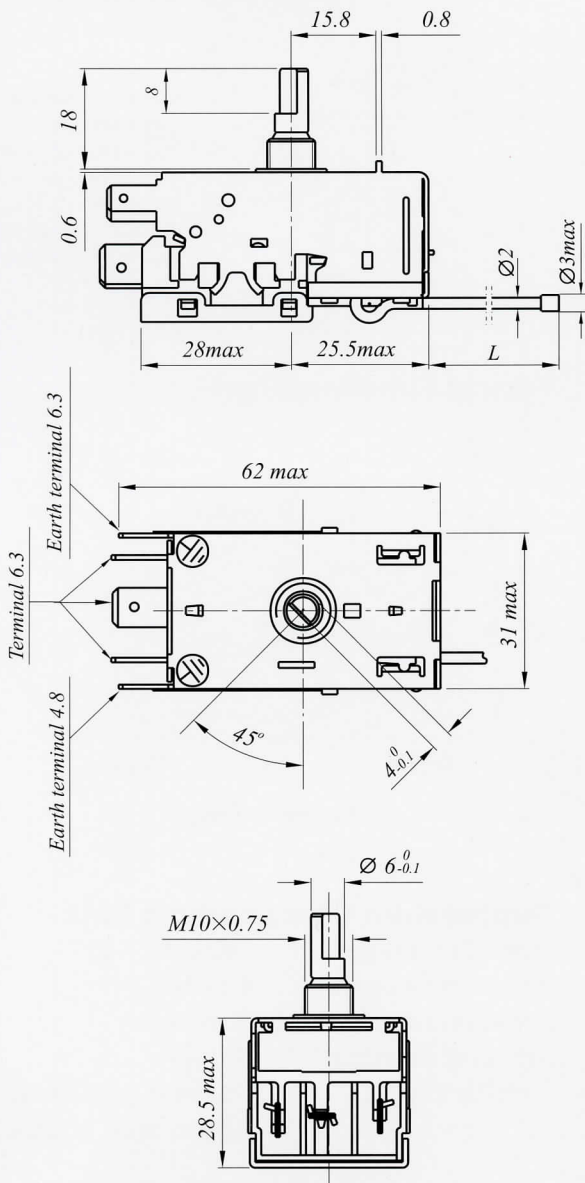

Typical Electrical Wiring Diagram

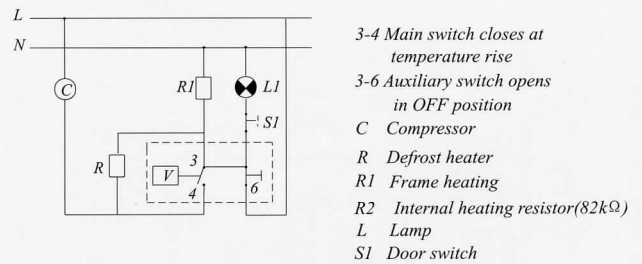

Typical Function Chart

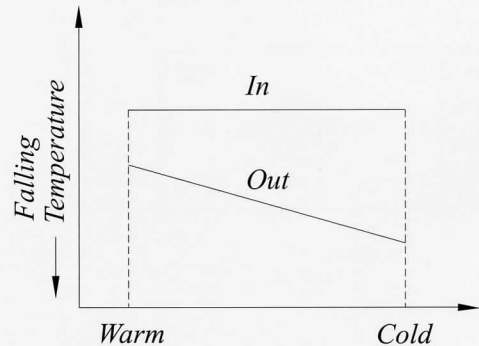

Temperature Characteristic Data

Operating range: -32°C to +6°C
Adjustment range: 4 to 18K
Constant cut-in value: +2 to +8K
Capillary type: Shape A (standard)
Shape B (on request)

Typical Applications

Refrigerators

Control shown in position COLD according to standard type, other dial shaft positions on request.